

FINGERTIP PULSE OXIMETER


JPD-500G(LED)

It adopts Photoelectric Oxyhemoglobin Inspection Technology in accordance with Capacity Pulse Scanning Recording Technology, which can be used to measure human oxygen saturation & pulse rate through finger.

The device is suitable for daily care in family, hospitals, oxygen bars, community healthcare and physical care in sports, etc. It can be used before or after exercise, it is recommended to measure in a calm state.



Pulse Rate Measuring



SpO₂ Measuring



Brightness Adjustable



Alert Function

SUITABLE FOR ALL KINDS OF PEOPLE

Designed for sports enthusiasts, aviators, bikers, mountain climbers or people interested in measuring their SpO₂ and pulse rate.

Value of oxygen saturation

Symbol of oxygen saturation

Symbol of pulse rate


Value of pulse rate

Low power indicator

Bluetooth

Perfusion index

Pulse rate bargraph

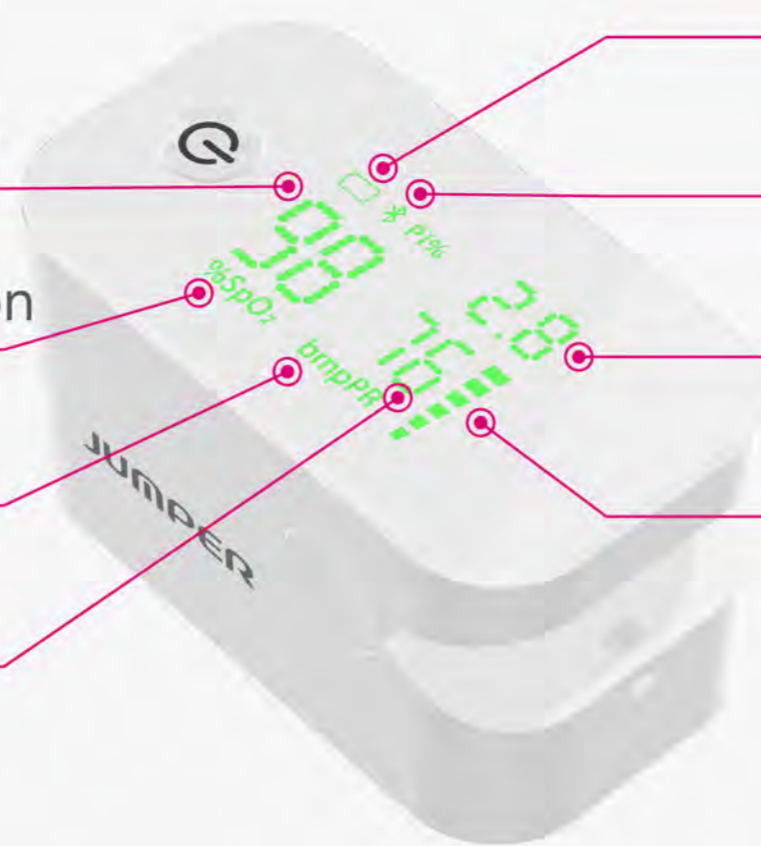

2 COLOR OPTIONAL



WIDE-RANGE FINGER SIZES



FAST & ACCURATE MEASUREMENT



SPECIFICATIONS

DISPLAY

LED

PARAMETERS

PR / SpO₂ / PI

APPLICATION RANGE

ADULT / ADOLESCENT

DIMENSIONS

58 x 32 x 32.9 mm

POWER SUPPLY

AAA x 2

WEIGHT

50.4g

ACCURACY

SpO₂

70 - 99%

± 2 %

INDICATION

LOW BATTERY REMIND

PULSE RATE

25-250 BPM

± 2 BPM

VALUE LIMITED REMIND

PACKAGING



ACCESSORIES

STORAGE BAG X 1

AAA BATTERIES X 2

HANGING ROPE X 1

USER MANUAL X 1

JUMPER HEALTH(APP)

USER MANUAL X 1

QUICK GUIDE X 1

CTN SIZE(CM)

46 X 28 X 29

QTY/CTN

100

GW(KG)

10

FCL/20

680